

Topakustik Perfo M


16/16/10

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions


formerly: TOPPERFO-M 16/16/10

Acoustic panels in their conventional form in all materials and surfaces. Perforation-free edges and interrupted perforations for cut-outs of your choice.



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

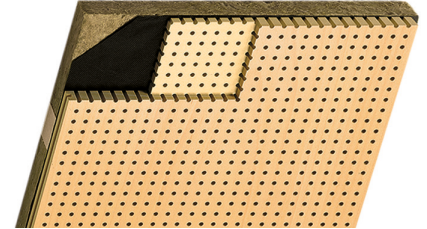

Normally flammable D-s2,d0 / CH RF 3



Painted
16 mm



Real wood
veneer 17 mm



Melamine
16 mm



Painted
16 mm



Real wood
veneer 17 mm



Melamine
16 mm

RESAP® core panel, non-combustible



Painted
16 mm



Real wood
veneer 17 mm

Flame retardant CH RF 2

maximal

3648 x 1216 3648 x 1216 3648 x 1216 3648 x 1216 3648 x 1216 3648 x 1216 3080 x 1216 3080 x 1216


ideal = means optimal use of MDF core – custom lengths are also available

2032 x 992 2032 x 992 2032 x 992 2032 x 992 2032 x 992 2032 x 992 1540 x 608 1540 x 608


2780 x 992 2780 x 992 2780 x 992 2780 x 992 2780 x 992 2780 x 992 2540 x 608 2540 x 608

3648 x 640 3648 x 640 3640 x 640 3080 x 608 3080 x 608


16/16/10-30 %




Edges



Clean cut




With surrounding tongue
and groove



Visible edge

... or according to
your specifications

Mounting



Topakustik Perfo M,
Ø 10 mm
Screwed through
socket inserted at
the rear

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)



See installation manual!