


# Topakustik Classic

## 5/1 M

TOP(A)K(U)S(T)I(K) 



Acoustic panel solutions



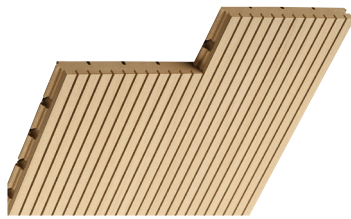




Compared to wider grooves, this grooving is less visible as the interplay of light and shadow appears constant due to the narrow groove spacing and therefore appears more flat. The narrow grooves require perfect assembly, as even the smallest differences in the surface are visible. Especially on medium to dark wood types and in combination with a black MDF core board, the fine look is a highlight in every project.

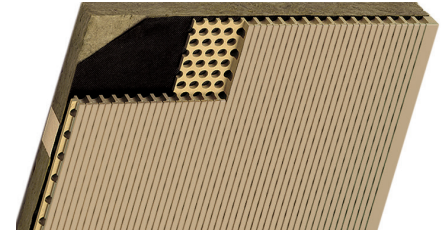


### Planks

Planks have tongue and groove connection and permit simple and flexible assembly. They can be installed by stapling to a timber batten or with turning-clip.









Normally flammable D-s2,d0 / CH RF 3			Flame retardant B-s1,d0 / CH RF 2			Fir knotless (ARIA-Pure)
						
Painted 16 mm	Real wood veneer 17 mm	Melamine 16 mm	Painted 16 mm	Real wood veneer 17 mm	Melamine 16 mm	Fir knotless 16 mm
Standard						
2780 x 128	2780 x 128	2780 x 128	2780 x 128	2780 x 128	2780 x 128	2480 x 128
3640 x 128			3640 x 128			
4080 x 128		4080 x 128	4080 x 128		4080 x 128	4080 x 128
Custom lengths are also available						




### Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Normally flammable D-s2,d0 / CH RF 3			Flame retardant B-s1,d0 / CH RF 2		
					
Painted 16 mm	Real wood veneer 17 mm	Melamine 16 mm	Painted 16 mm	Real wood veneer 17 mm	Melamine 16 mm
maximal					
4080 x 1216	3640 x 1216	4080 x 1216	4080 x 1216	3640 x 1216	4080 x 1216
ideal = means optimal use of MDF core – custom lengths are also available					
2040 x 992 / 640	2040 x 992 / 640	2040 x 992 / 640	2040 x 992 / 640	2040 x 992 / 640	2040 x 992 / 640
2780 x 992 / 640	2780 x 992 / 640	2780 x 992 / 640	2780 x 992 / 640	2780 x 992 / 640	2780 x 992 / 640
3640 x 640	3640 x 640			3640 x 640	

### 5/1 M-5%



### Sound absorption data acc. to ISO 354

**Suspension height:**  
 — approx. 226 mm  
 - - - - - approx. 66 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m<sup>3</sup>)

### Flexible plank width

The plank has a standard width of 128 mm and is **now flexible** up to 288 mm. We look forward to receiving your non-binding enquiry.

Width (x)	Quantity Clip/m <sup>2</sup>	Reveal	Grate spacing
128 mm (Standard)	18	2 mm	max. 600
192 mm (Flex)	14	2mm	max. 600
256 mm (Flex)	16	2 mm	max. 500
288 mm (Flex)	12	2 mm	max. 500